

ArcSource Inground 6 RGB™



The Anolis ArcSource Inground range brings the ArcSource range to the world of exterior lighting. Industry standard Inground fittings with an IP67 Rating, complete with Drive over loadings.

TECHNICAL SPECIFICATIONS:

Power Supply Required: See Below Listing
 Max Power Consumption: 8.4W
 Available Beam Angles: See Pg 4
 Impact Rating: IK 08
 Ingress Protection Rating: IP67
 Light Source: High Power LED's
 LED Life Expectancy: Min 50000 Hrs
 Typical Lumen Maintenance: 70% @ 50000 hrs

Construction: Stainless Steel, Plastics Housing
 Product Weight: 1,2kg
 Operating Ambient Temp Range: -20°C/+40°C
 Operating Temp: +60°C @ Ambient +40°C
 LED Colour Variants: See Pg 4
 Cooling System: Convection
 Cable Type: Chogori 08BMMA-SL8001 (Male)


For further information regarding optical systems please visit the website: www.anolis.eu

Accessories:


Compatible Drivers:

ArcPower 16 x 12, 16 x 6, 36, 72, 144, 360, RM384


DIMENSIONAL DRAWINGS:

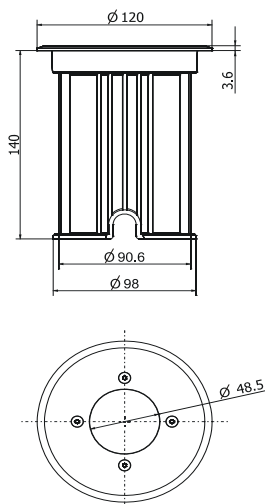


CONNECTION SCHEME:

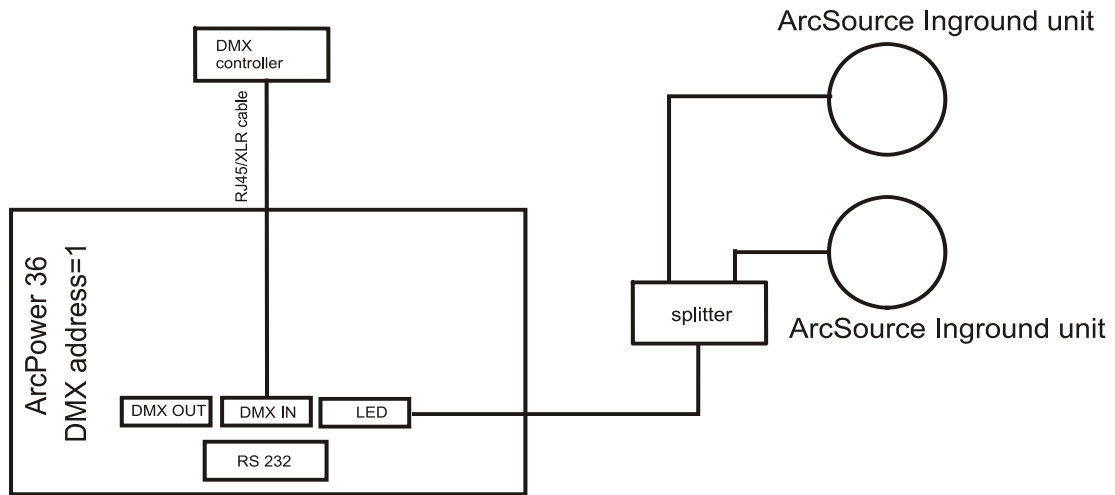


LDC Polar

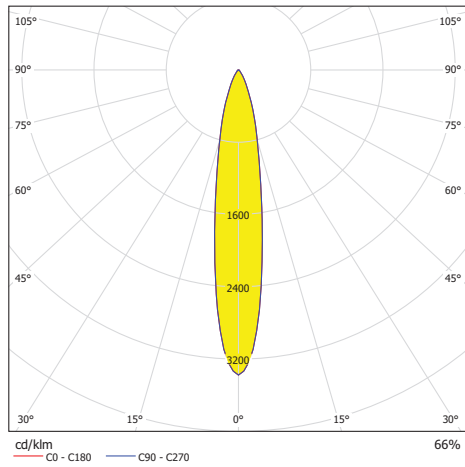


Cone Diagram

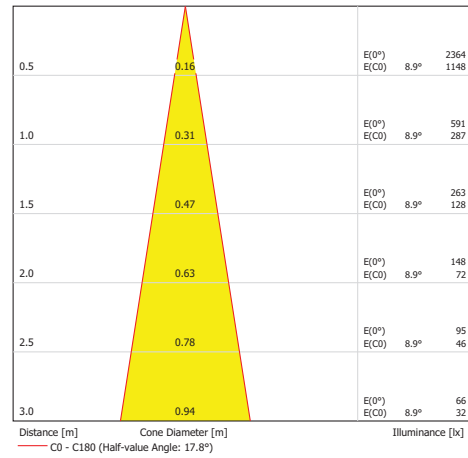

Colour Rendering

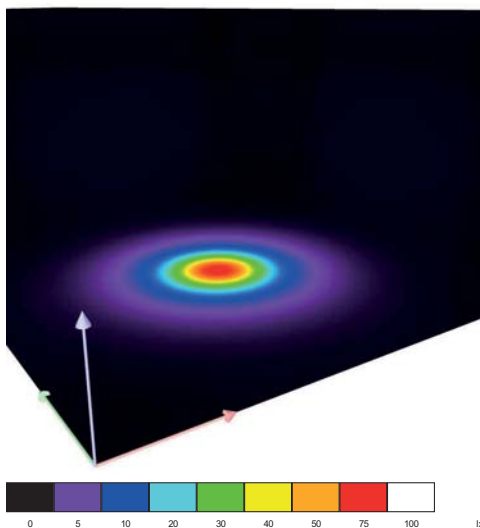

Floor Isolines (E)

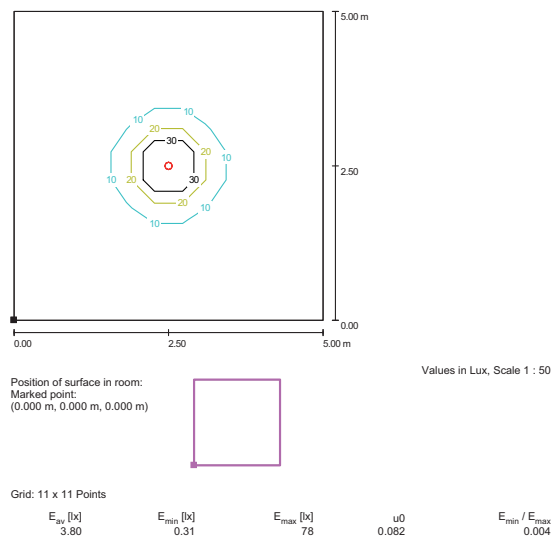

Room Details


Height of working plane: 0.850 m

Boundary Zone: 0.000 m

Maintenance factor: 0.80

Height of Room: 2.800 m

Ground area: 25.00 m²



Surface	Rho [%]	from ([m] [m])	towards ([m] [m])	Length [m]
Floor	20	/	/	/
Ceiling	70	/	/	/
Wall 1	50	(0.000 0.000)	(5.000 0.000)	5.000
Wall 2	50	(5.000 0.000)	(5.000 5.000)	5.000
Wall 3	50	(5.000 5.000)	(0.000 5.000)	5.000
Wall 4	50	(0.000 5.000)	(0.000 0.000)	5.000

PRODUCT SPECIFICATION CHART:

1006 0623	CW	25°
1006 0630	CW	6°
1006 0628	G	18°
1006 5629	NW	6°
1006 5625	R	6°
1006 5785	R	6°
1006 0621	RGB	18°
1006 0781	RGB	18°
1006 0622	RGB	6°
1006 0624	WW	18°
1006 5621	WW	6°
1006 1945	WWAWW	6°
1006 0625	WWRGB	18°
1006 5622	WWRGB	6°

ACCESSORIES:

Other variants available on request